



LAZER Z[®] E-SERIES

UNMATCHED PERFORMANCE. LEGENDARY DURABILITY.

FEATURES

UltraCut™ Deck Technology

Side Discharge: 48 | 52 | 60 | 72

Commercial-Grade Engines


Kohler®, Kawasaki® or Vanguard®

Unibody Frame

Fully welded tubular frame design places major components like the engine, hydro-drive and fuel tank lower for better mass centralization

Hydro-Drive System

Eliminated hoses and added tougher bearings, an improved cooling system and increased oil capacity.

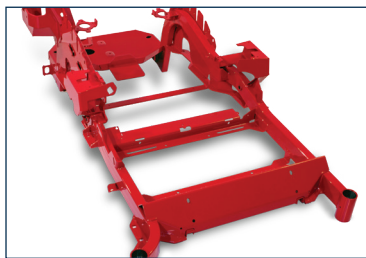

UNIBODY FRAME

The fully-welded tubular frame design places major components like the engine, hydro-drive and fuel tank lower for better mass centralization. This provides increased hillside traction and stability, with heightened maneuverability.



THE SIGNATURE CUT

We've optimized the blade-tip speed of the UltraCut decks to perfect the distance and uniformity of clipping discharge. All the components in our deck work together to deliver the signature Exmark look, cut after cut. Job after job.

TOP ACCESSORIES

- Air Ride Suspension Kit
- LED Light Kit
- Micro-Mulch System
- Operator Controlled Discharge
- Sun Shade
- TractusTire
- Trash Container
- Turf Striping Kit
- UltraVac Collection Systems

Accessories may not fit each mower model. Please visit exmark.com or check with your dealer on accessory fit-up for each model.

The commercial mowers more landscape pros trust.

exmark.com

LAZER Z E-SERIES

MODEL	ENGINE	SIZE	DECK	WEIGHT	DIMENSIONS (W X H X L)
LZE651CKA484A2	FX651V Kawasaki	48"	UltraCut Series 4	1118 lbs.	59.6" x 70.5" x 79.2"
LZE751CKA524A2	FX751V Kawasaki	52"	UltraCut Series 4	1136 lbs.	64.8" x 70.5" x 79.2"
LZE742GKC604A3	CV742 Kohler	60"	UltraCut Series 4	1279 lbs.	72.8" x 70.5" x 83.1"
LZE801CKA604A1	FX801V Kawasaki	60"	UltraCut Series 4	1180 lbs.	72.8" x 70.5" x 83.1"
LZE810GBV604A3	810 Vanguard	60"	UltraCut Series 4	1279 lbs.	72.8" x 70.5" x 83.1"
LZE801GKA724A1	FX801V Kawasaki	72"	UltraCut Series 4	1244 lbs.	84.9" x 70.5" x 86.1"



Side Discharge

POWER COMPONENTS

Engine – FX651V, FX751V & 801V Kawasaki V-Twin, CV742 Kohler and 810 Vanguard engines. All engines are governed to 3,750 rpm.

Air Filter – Heavy-duty canister air filtration system.

Drive System – Two Exmark exclusive Parker unitized pump and wheel motor systems with no hoses, 1.7-quart integrated reservoir, spin-on filter and heavy-duty components. 12cc pumps and 14.5 cubic inch motors. 60" & 72" units also has integrated cooling fans and shock valves.

Hydro Fluid – Exmark Premium Hydro Oil.

Speed – Infinitely variable speed selection 0–8.0 mph (12.9 kmph) forward, 0–6.0 mph (9.7 kmph) reverse on 48" and 52" units. Infinitely variable speed selection from 0–10.0 mph (16 kmph) forward, 0–6.0 mph (9.7 kmph) reverse on 60" and 72" units.

PTO Engagement – MagStop Electromagnetic 175 ft-lbs clutch with spot brake on 48" and 52" models. MagStop electromagnetic 200-ft-lbs clutch with spot brake on 60" and 72" models.

Fuel Capacity – 8-gallon (30.3-L), single fuel tank with single fill location.

Drive-Wheel Release – Allows unit movement without engine running.

Safety Package – Operator Presence Controls (OPC) and drive system interlock, with safety interlock system indicators.

Rollover Protection System (ROPS) – 2-post foldable ROPS standard with seat belt and latch.

Quick Deck Lift – Standard; foot-controlled deck lift changes cutting height and lifts the deck to maneuver around obstacles, or place in transport position.

DECK

Style – Full-floating UltraCut Series 4. Side-discharge standard with the option to bag or mulch.

Deck Construction – 10-gauge top that is formed and continuously seam welded, 7-gauge side skirt and 7-gauge reinforced spindle mounting locations for improved strength. 4-point suspension, full floating deck with 3 adjustable anti-scalp rollers on 48" & 52". 4 adjustable anti-scalp rollers on 60"; 6 adjustable anti-scalp rollers on 72".

Widths Available – 48" (122 cm), 52" (132 cm), 60" (152 cm) and 72" (183 cm).

Cutting Height – 1.0" (2.5 cm) to 5.5" (11.8 cm) in 0.25" (0.64 cm) increments adjustable from operator's seat.

Blade Spindles – No maintenance, sealed and non-greasable spindles. 7.75"-diameter cutter housing with 25mm (.98") -diameter spindle shaft and splined blade driver.

Blade-Tip Speed – Approximately 18,500 fpm.

EQUIPMENT

Tractor Frame – Unibody, welded, heavy-duty 1.5" x 3" tubular steel.

Steering and Motion Control – Hydraulically dampened twin levers, adjust fore and aft, also adjustable to 2-height positions. Adjustable dampers (3-positions) to customize drive responsiveness.

Casters – .50" thick caster yoke arm.

Front Caster Tires – 13 x 5.0–6, smooth-tread, semi-pneumatic. A1, C1 models have 13 x 6.5.0–6, smooth-tread, semi-pneumatic.

Drive Tires – 23 x 9.5–12, 4-ply Super Turf drive tires on 48" and 52" models. 24 x 12–12, 4-ply Super Turf drive tires on 60" and 72" model.

Turning Radius – True zero-turn.

Parking Brake – Lever-actuated disc brake.

Seat Comfort – Two-toned, bolstered seat with Elastomeric Vibration Controlled material. Adjustment: fore and aft from operator's position. A1 & A2 have deluxe, bolstered suspension seat with Elastomeric Vibration Control material. C1 models include a suspension platform. The suspended operator platform maximizes productivity through increased operator comfort.

Diagnostics – Operational diagnostics with integral fuel gauge. EFI unit has malfunction indication light (MIL).

Electrical – 12-volt battery with 15-amp alternator. 20-amp on Kohler EFI models.

Standard Features – Engine hour meter and cup holder.

ACCESSORIES & OPTIONS

3-Bushel Bagger, 12-Volt Adapter, Air Ride Anti-Scalp Kit, Suspension Seat, Equipment Cover, Extended Drive Lever, Floor Mat, Full-Suspension Seat, Harness Add-On Accessory Kit, Hitch Kit, Hydro Maintenance Kit, Hitch Kit, Jack and Receiver, LED Light Kit, Micro-Mulch System, Operator Controlled Discharge, Pedal Adapter Kit, Power Deck Lift, Seat Isolation System, Sun Shade, Suspension Platform Weight Adapter Kit, Tractus Tire, Trash Container, Turf Striping Kit, UltraVac Collection Systems and Custom Ride Seat Suspension.

Accessories may not fit each model. Please visit exmark.com or check with your dealer on accessory fit-up for each model.

WARRANTY

Limited Warranty: 5-Year or 1,250 Hours (with No Hour Limit First 2 Years), 3 Year Engine



EXMARK MANUFACTURING COMPANY INC. • 415 INDUSTRIAL ROW • BEATRICE, NE 68310 • Call 402.223.6300 • exmark.com

¹ Many manufacturers use 100% efficiency ratings for sale purposes. Exmark believes an 80% efficiency rating is more representative of actual mowing conditions, as it allows for turns and overlapping. Formulas for calculating acres per hour: 100% efficiency: MPH x width of cut = 99 = acres per hour | 80% efficiency: MPH x width of cut = 124 = acres per hour.

² For complete details, visit exmark.com or your local dealer.

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs and standard equipment without notice and without incurring obligations. See your dealer for details on all of our warranties. Exmark® and Lazer Z® are registered trademarks of Exmark Mfg. Co., Inc. ©2022 Exmark Manufacturing Company, Inc. All Rights Reserved. Printed in the U.S.A. 2022. Rev 1.